


CONDUCTOR STRINGING EQUIPMENT **DP200 Single Drum Puller**

For Single and Bundle Transmission Conductors

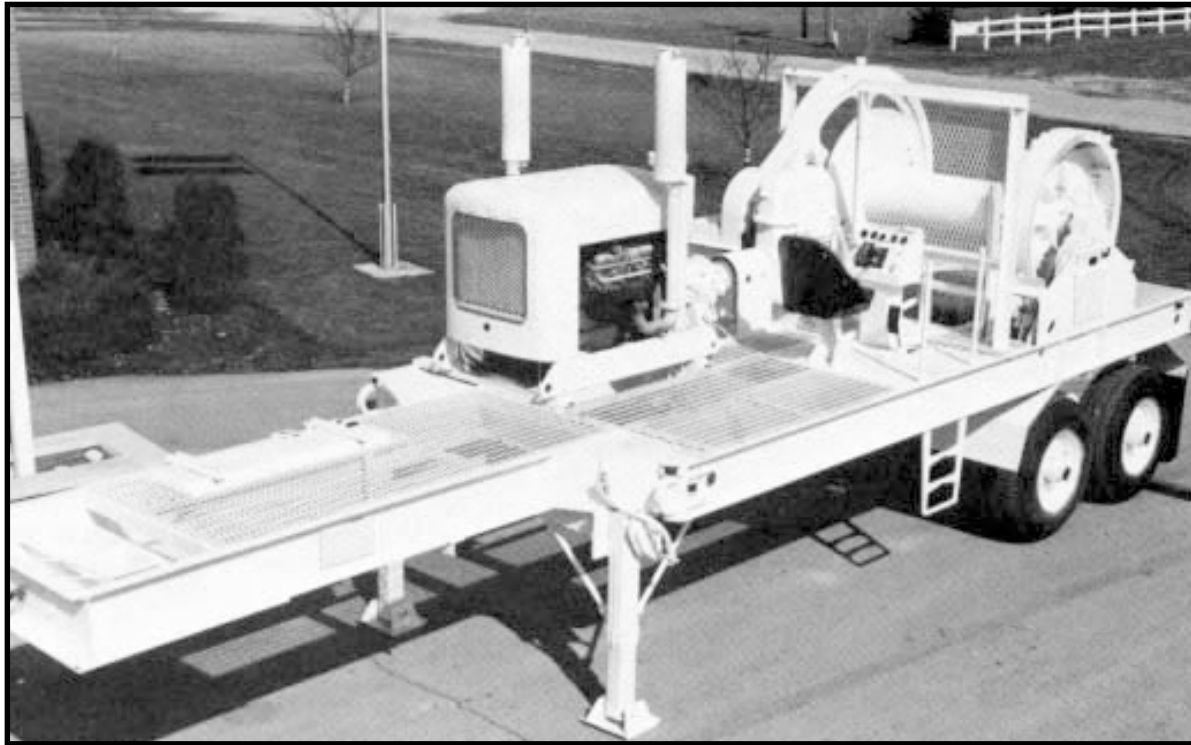

MODEL DP200 (mounted on fifth wheel trailer)

SPECIFICATIONS

Maximum Continuous Linepull	10,000 lbs. @ 4.0 mph 20,000 lbs. @ 3.3 mph
Maximum Intermittent Linepull	24,000 lbs.
Linespeed	0-5 mph
Engine	270 HP Diesel
Drum Capacity	25,000' of 1/2" rope 16,000 of 5/8" rope 11,000 of 3/4" rope

STANDARD EQUIPMENT

Self aligning spherical roller and ball bearings are used in all shaft pillow blocks.
The frame is all steel welded construction adequately braced to ensure alignment of drive components.

OPTIONAL EQUIPMENT

Trailer mounting - fifth wheel, tandem axle including air brakes, breakaway connections with fenders and mudflaps
High regulation lighting can also be provided
Hydraulic operated levelwind boom
A heavy-duty collapsible cab, complete with shatter-resistant plexiglass, protective wire screen and heater

At TSE, engineering is a process of continuous product improvement; therefore, specifications are subject to change without notice.

16-6290-062

TSE International, Inc.
5301 Shreveport-Blanchard Highway
Shreveport, Louisiana 71107

www.tse-international.com

Toll Free: 800-825-2402
Telephone: 318-929-2368
FAX: 318-929-4853