


 **TEREX**
LOAD KING

MODEL 352 SS

Signature Series

(Detachable Gooseneck, Non-Ground Bearing)

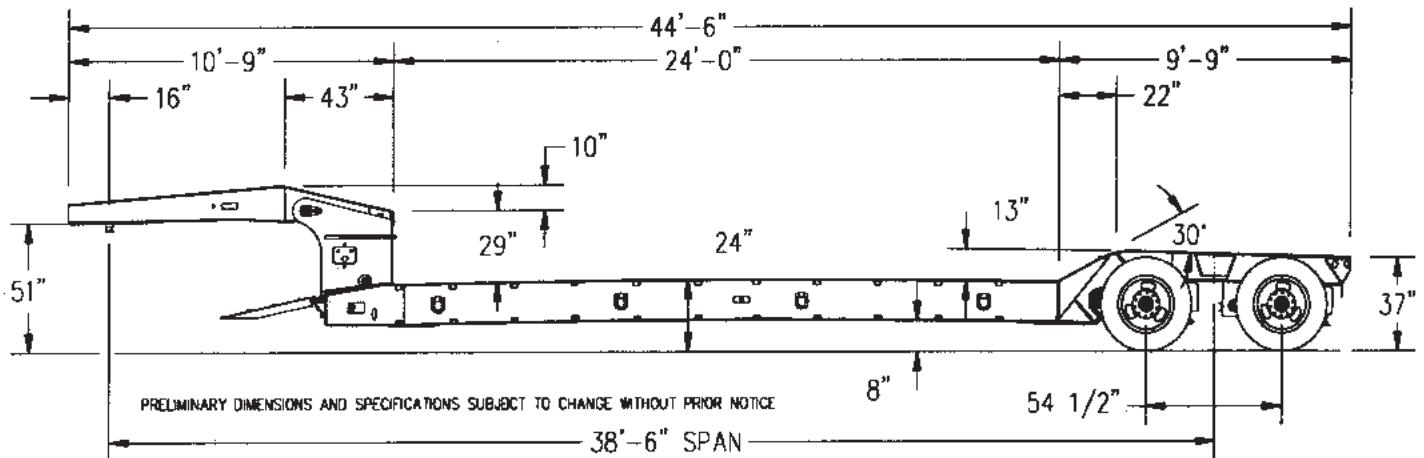

GENERAL SPECIFICATIONS

Net Capacity: (70,000lbs. in 12'-0" Load Concentration @ 60 MPH)

Estimated Weight: 14,500 lbs.

Construction: 100 KSI / 80 KSI Minimum Yield Steel

Gooseneck: 10'-9"/84" Swing Clearance, Non-Ground Bearing Detachable, Wet Kit Operation (Less Tractor Portion) with Hydraulic Frame Lift & Gsnk Ratchet

Ramps: 30" Front Flip Up

Deck Length: 24'-0"

Deck Width: 102"

Deck Height/Ground Clearance: 24" / 8" Loaded

Deck Beams: Cambered w/ 4 Full depth 16" Beams

D-Rings: (4) Per Side of Deck

Outriggers: Yokes Only

Decking: 2" Hard Wood (Open Center)

Rear Drop: 30 Degrees (Radiused)

Rear Bolster: 3/4 Height

Suspension: Air Ride

Axle Spacing: 54 1/2"

Tires: (8) 255/70 R 22.5

Wheels: (8) Hub Piloted Budd Type Disc Outboard Mount Hubs

Brakes: 16 1/2" x 7" w/ Spring Brakes and ABS System

Lights: DOT Rubber Mounted Sealed Beam w/ Modular Harness

Paint: Load King Black Acrylic Enamel

(Not Designed for Center Loading)